




BLUSoda

30
l/hstainless
STEELDRY
COOLINGGAS
R290

fizz

	BLUSODA TOUCH FREE 30	BLUSODA TOUCH FREE 30 FIZZ
Cooling capacity (l/h)	30	30
Max continuous supply (l)	6	6
Cold water temperature*	5 - 12 °C	
Pump	-	Professional membrane carbonation pump
Cooling technology	Aluminum fusion block	
Condensation	Forced ventilation	
Refrigerant gas	R290	
Adjustable thermostat	Yes	
Supply	230 V - 50 Hz	
Compressor power	1/8 HP	1/5 HP
Absorbed power	230 W - 1 A	300 W - 1,3 A
Working room temperature	Min 5°C - Max 35°C	
Inlet water pipe	Ø5/16" (8 mm)	
Inlet CO ₂ pipe	Ø5/16" (8 mm)	
Dispensing area height (mm)	276	329
Typology	Countertop	
Net weight (kg)	23,3	23,3
Gross weight (kg)	26	28
Dimensions W x D x H (mm)	261x499x418	261x499x418
Packaging dimensions (mm)	310x540x470	310x540x470

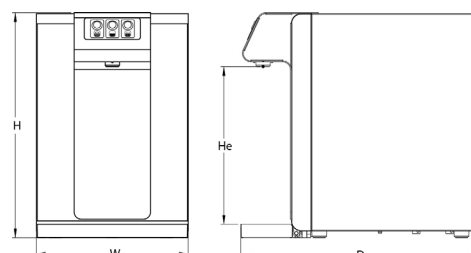

Dispensing options	Cold still water, cold sparkling water and room temperature water (mod. Fizz) or cold still water and room temperature water or cold still water and cold sparkling water
Materials	Parts in robust stainless steel

CERTIFICATIONS



OTHER CHARACTERISTICS

NANO SILVER PIPE at the dispensing point
NANO SILVER PROTECTION on the surface
Drip tray prepared for drainage

OPTIONAL

Filters UV OUT in substitution of the NANO SILVER PIPE

Cabinet BLUSODA CABINET in stainless steel

* rated at a room temp. of 25 °C and inlet water temp. of 20 °C